How to enable device discovery

This feature allows to find other devices compatible with the available discovery protocols, as well as to broadcast information to other devices. MI10 and MO10 support LLDP, CDP and MNDP protocols to broadcast the device information. You can follow the steps below to adjust LLDP/CDP/MNDP settings for MI10 and MO10.

1. Access the device settings menu via Ethernet.
   (1) Configure your PC's IP setting to static and then set the IP address to any address from 192.168.19.2 to 192.168.19.250
   (2) Connect your PC's network port to the device WAN port.
   (3) Enter the IP address 192.168.19.1 in your browser.
   (4) In the PRISM login screen use the following login:
   Username: prism
   Password: prism

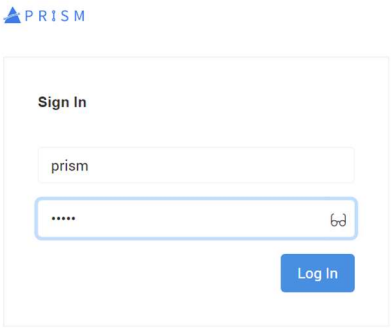

Note:
1. If the device IP address and username/password have been changed, please use the new IP address and username/password to login.
2. You can refer to the Quick Start Guide for more information on how to login device.

2. After logging in to the device's web GUI, navigate to the Settings/Service/Device discovery to show the device discovery settings page.

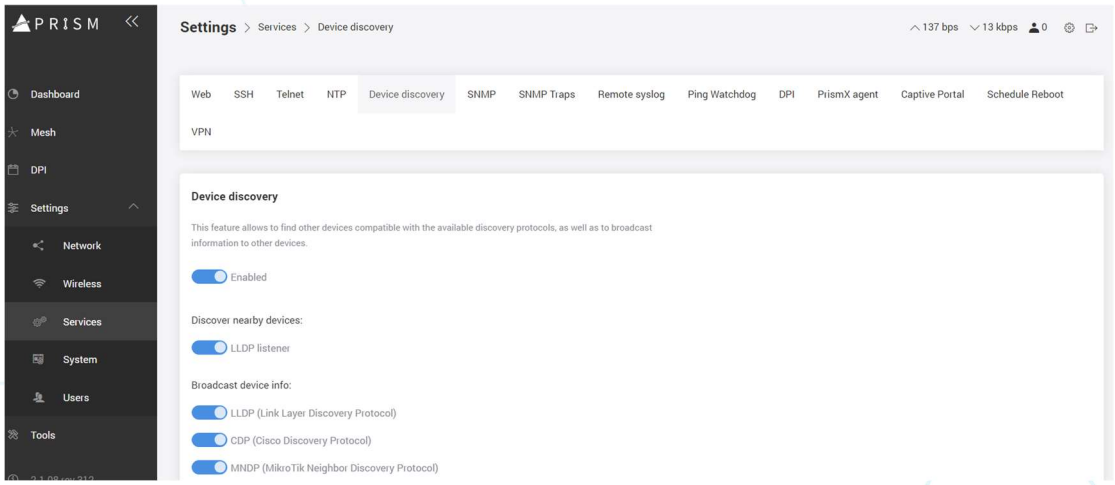

3. You can determine which protocol you want to enable to broadcast the device information and to enable LLDP listener to find the other MI10/MO10 with LLDP protocol.