How to set as AP mode and Bridge mode

1. Access the device settings menu via Ethernet.
   (1) Configure your PC's IP setting to static and then set the IP address to any address from 192.168.19.2 to 192.168.19.250
   (2) Connect your PC's network port to the device WAN port.
   (3) Enter the IP address 192.168.19.1 in your browser.
   (4) In the PRISM login screen use the following login:
   Username: prism
   Password: prism

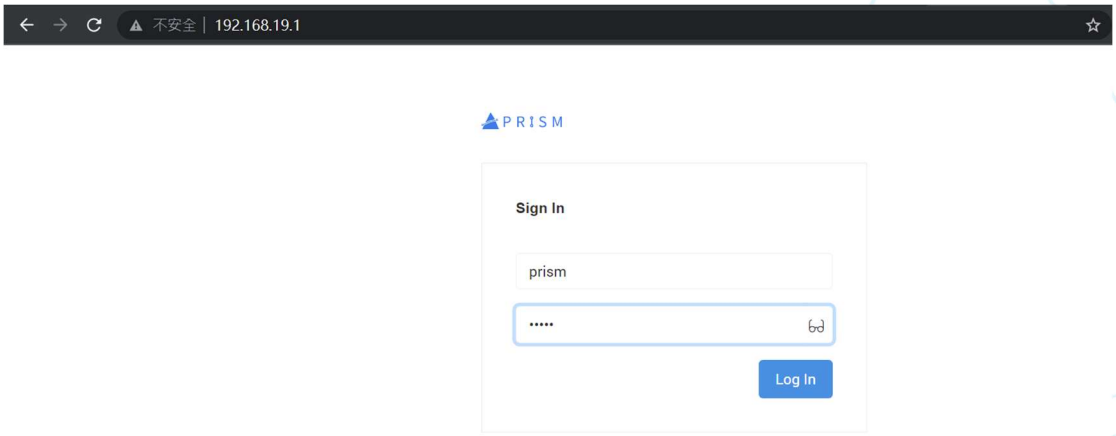

   Note:
   1. If the device IP address and username/password have been changed, please use the new IP address and username/password to login.
   2. You can refer to the Quick Start Guide for more information on how to login device.

2. The MO10/MI10 incorporates a "network zone" design, allowing users to flexibly change between router, AP and bridge mode.
   The default Network Zone configuration:
   In Settings>Network>Zones, one Network Type as WAN(Internet) and one Network Type as LAN(Local Network).

   You can change between modes by editing the Network(VAP/SSID) in Settings>Wireless

   Router Mode:
   1). In Settings>Wireless, select the Network(VAP/SSID) you want to change.
   2). Select "Local Network" at the Network Zone drop-down menu.

This configures the MO10/MI10 as a "Router," directing all data from the local network to the internet via NAT.

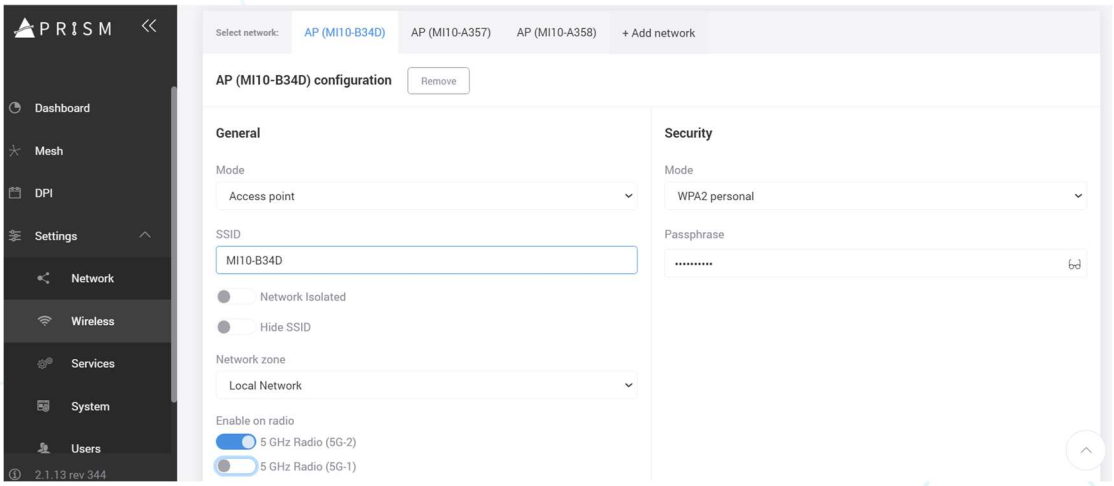

AP Mode:

1). In Settings>Wireless, select the Network(VAP/SSID) you want to change.

2). Select "Internet" at the Network Zone drop-down menu.

This configures the MO10/MI10 as a "Access Point", all data goes straight through to the internet without NAT.

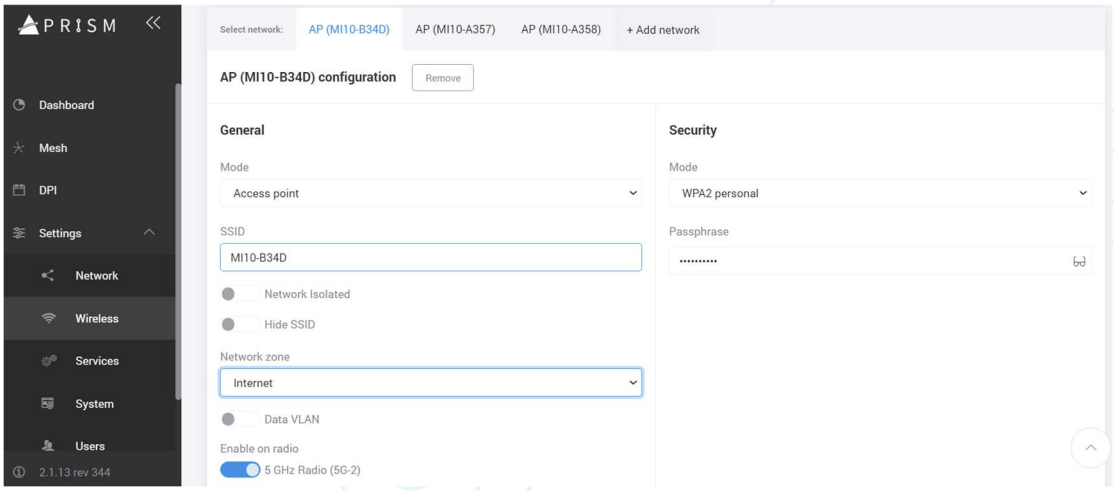

Bridge Mode:

*Only the first VAP can be edited to "Station", and change the MO10/MI10 into bridge mode.

1). In Settings>Wireless, select the first Network (VAP/SSID).

2). Select "Station" at the Mode drop-down menu.

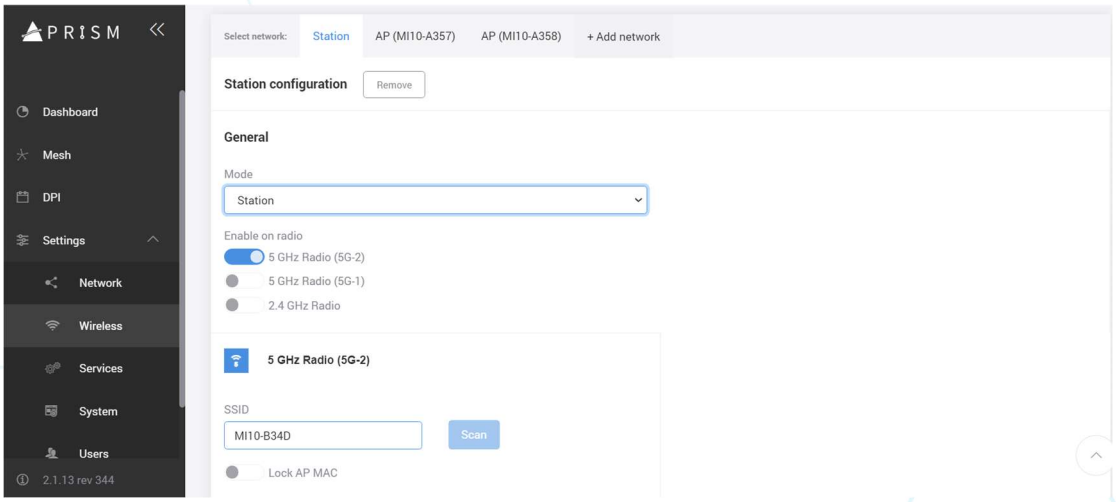

This allows the MO/MI10 to wirelessly connect to another Access Point.