How to setup country code

Country code is important for complying with the wireless regulations of a specific country. It helps ensure that the device operates within the allowed frequency ranges, power levels, and other regulatory parameters specified by that country. You can follow the steps below to setup Country code for MI10 and MO10.

1. Access the device settings menu via Ethernet.
   (1) Configure your PC's IP setting to static and then set the IP address to any address from 192.168.19.2 to 192.168.19.250
   (2) Connect your PC's network port to the device WAN port.
   (3) Enter the IP address 192.168.19.1 in your browser.
   (4) In the PRISM login screen use the following login:
   Username: prism
   Password: prism

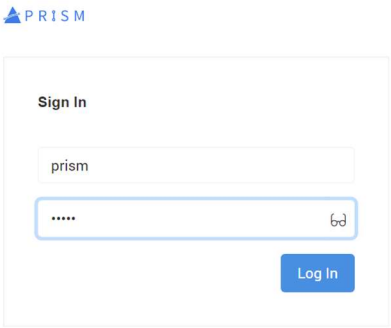

Note:
1. If the device IP address and username/password have been changed, please use the new IP address and username/password to login.
2. You can refer to the Quick Start Guide for more information on how to login device.

2. After logging in to the device's web GUI, navigate to the Settings/System to show the System settings page.

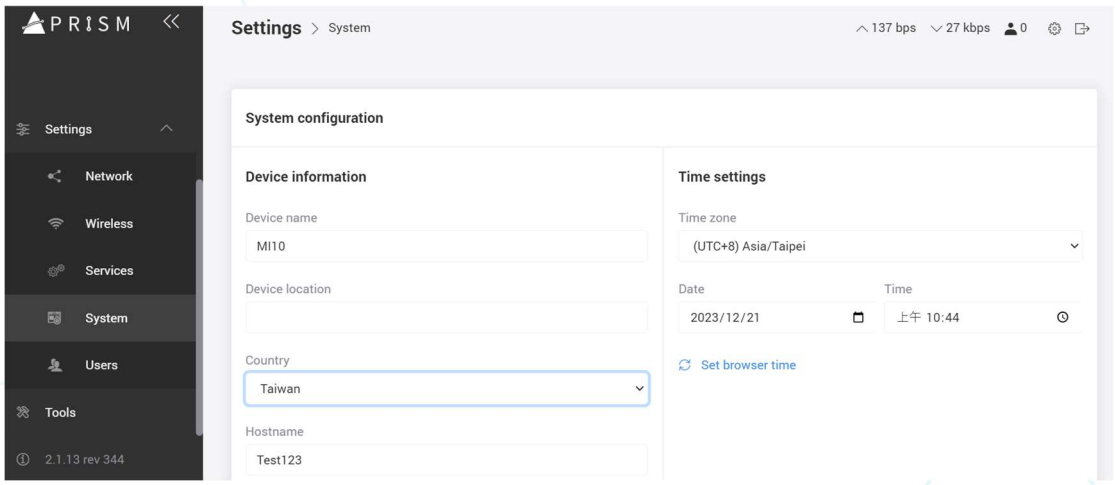

3. Select the country you located at the “Country” drop down menu and press “Save”.
   Note: The wireless radio channels and power levels might be changed to apply the rules by the selected country.